Product installation diagrams

Models:
DD900BK
DD600BK
DD600SS

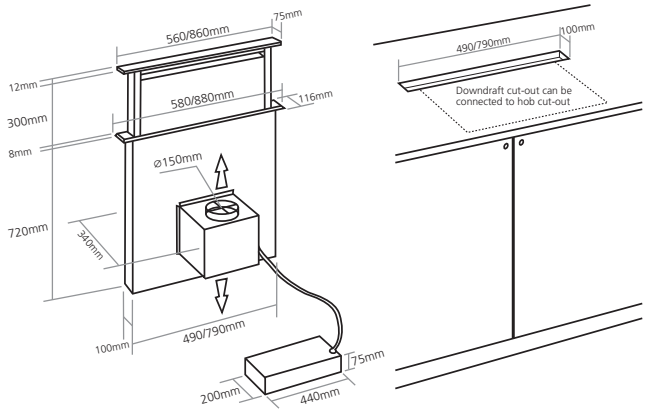

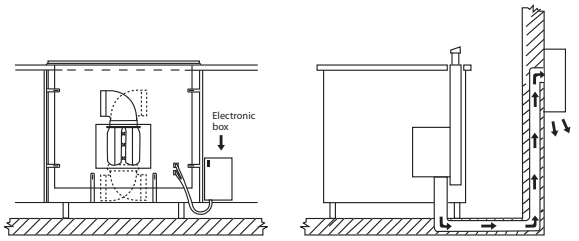

Installation made easy

Minimum cabinet depth depends on orientation, hob type and worktop material.

Cabinet base may need to be cut or routered to accommodate height of unit.

If positioned behind a hob, minimum cabinet width is 800mm.

If positioned alongside a hob, the cabinet may need to be reinforced to strengthen where the base has been modified.

The hood can be fitted right up to either a gas or electric hob, but always ensure that the independent electronics box in the cupboard below is installed at least 650mm from the heat source.

The motor can be fitted to the opposite side enabling the downdraft to be positioned behind a hob and under-counter oven.